

On three domination-based identification problems on block graphs*

Dipayan Chakraborty[†]

— joint work with

Florent Foucaud[†], Aline Parreau[‡] & Annegret Wagler[†]

*This work was sponsored by a public grant overseen by the French National Research Agency as part of the “Investissements d’Avenir” through the IMobS3 Laboratory of Excellence (ANR-10-LABX-0016) and the IDEX-ISITE initiative CAP 20-25 (ANR-16-IDEX-0001).

[†]LIMOS, Université Clermont Auvergne, France

[‡]CNRS, LIRIS, Université Claude Bernard Lyon 1, France

Identifying code (ID-Code)


[Karpovsky et. al., 1998]

Locating-dominating code (LD-Code)

[Slater, 1987]

Open-locating-dominating code (OLD-Code)

[Seo & Slater, 2010]

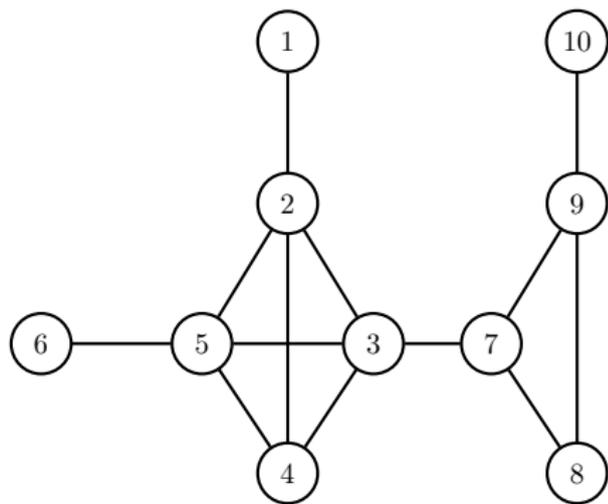

Identifying code (ID-Code)

[Karpovsky et. al., 1998]


- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code (LD-Code)

[Slater, 1987]

Open-locating-dominating code (OLD-Code)

[Seo & Slater, 2010]

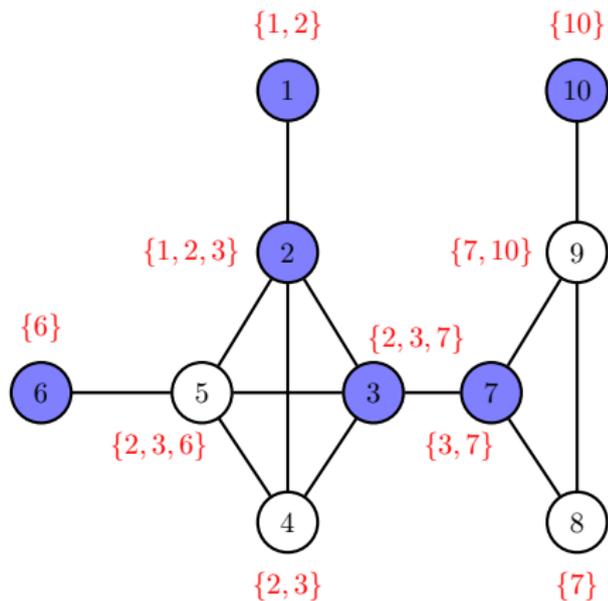

Identifying code (ID-Code)

[Karpovsky et. al., 1998]


- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code (LD-Code)

[Slater, 1987]

Open-locating-dominating code (OLD-Code)

[Seo & Slater, 2010]

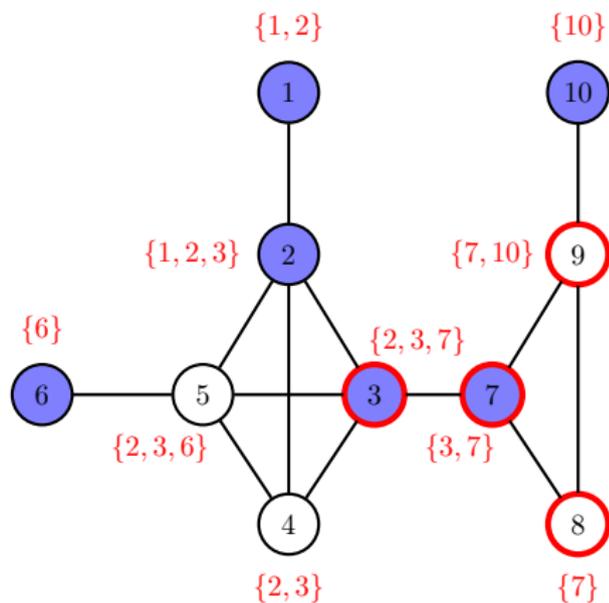

Identifying code (ID-Code)

[Karpovsky et. al., 1998]


- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code (LD-Code)

[Slater, 1987]

Open-locating-dominating code (OLD-Code)

[Seo & Slater, 2010]

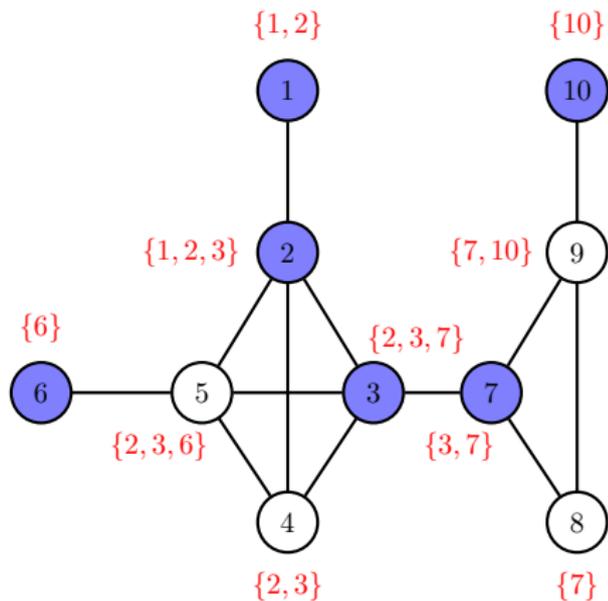

Identifying code (ID-Code)

[Karpovsky et. al., 1998]


- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code

(LD-Code) [Slater, 1987]

Open-locating-dominating code

(OLD-Code) [Seo & Slater, 2010]

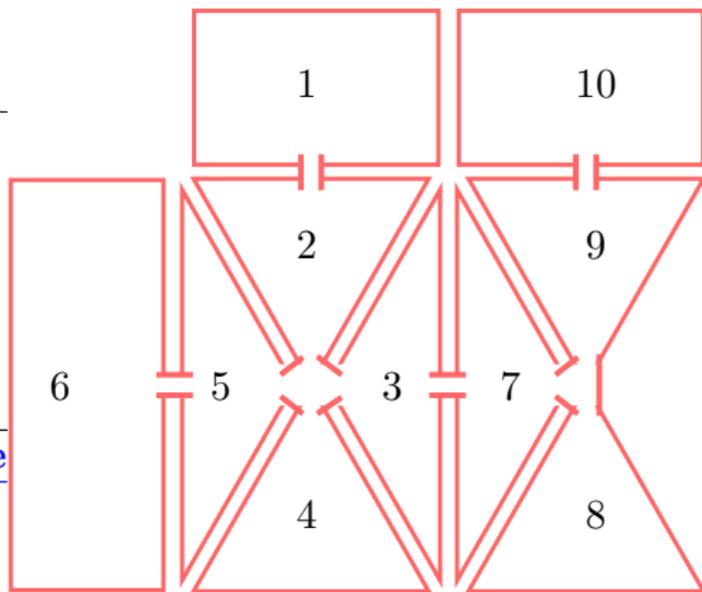

Identifying code (ID-Code)

[Karpovsky et. al., 1998]


- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code

(LD-Code) [Slater, 1987]

Open-locating-dominating code

(OLD-Code) [Seo & Slater, 2010]

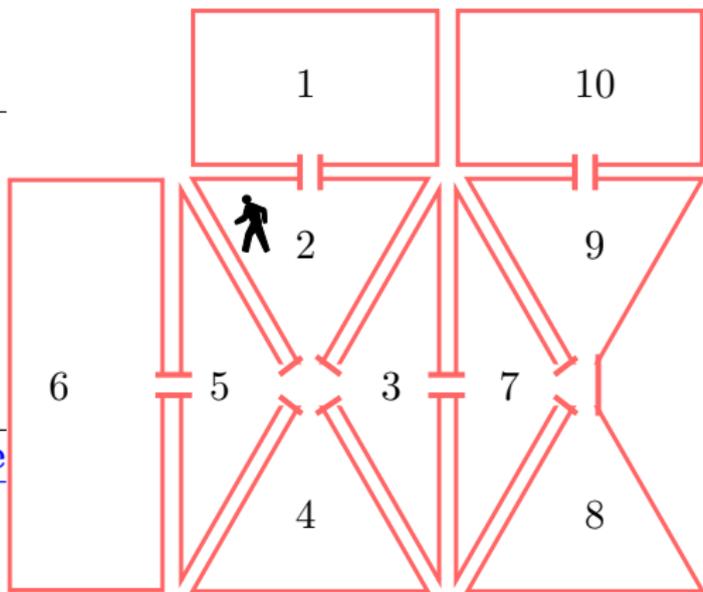

Identifying code (ID-Code)

[Karpovsky et. al., 1998]


- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code

(LD-Code) [Slater, 1987]

Open-locating-dominating code

(OLD-Code) [Seo & Slater, 2010]

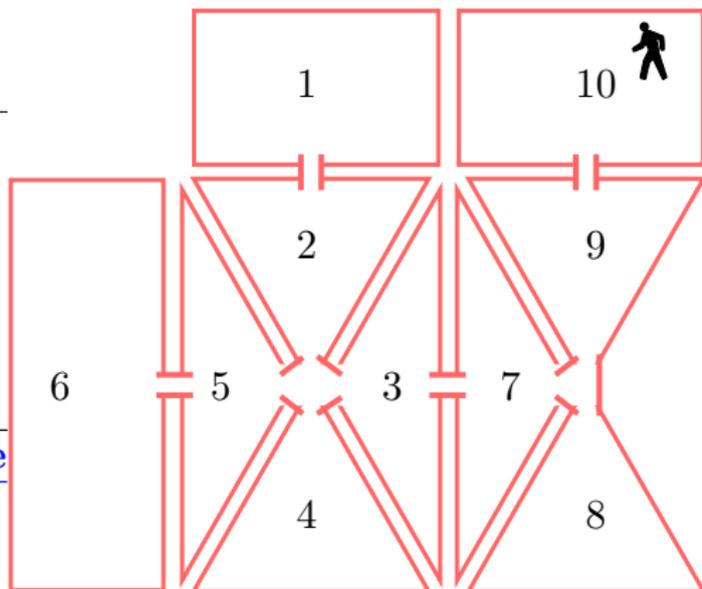

Identifying code (ID-Code)

[Karpovsky et. al., 1998]


- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code

(LD-Code) [Slater, 1987]

Open-locating-dominating code

(OLD-Code) [Seo & Slater, 2010]

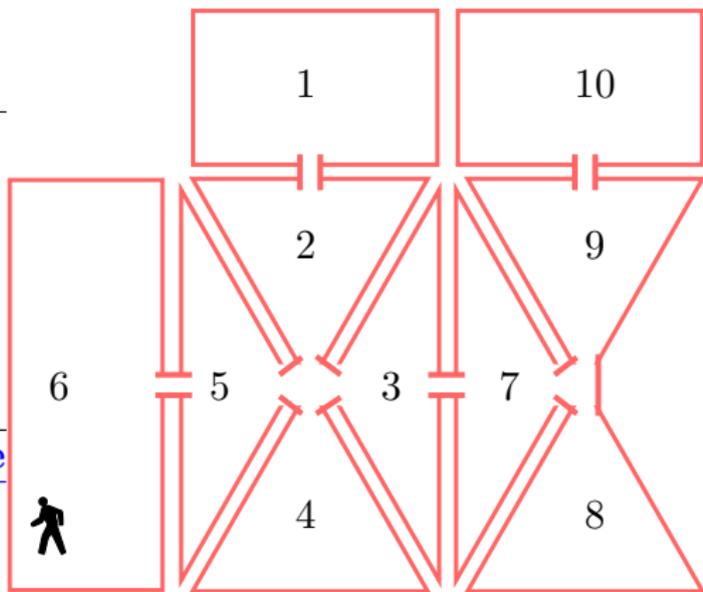

Identifying code (ID-Code)

[Karpovsky et. al., 1998]


- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code

(LD-Code) [Slater, 1987]

Open-locating-dominating code

(OLD-Code) [Seo & Slater, 2010]

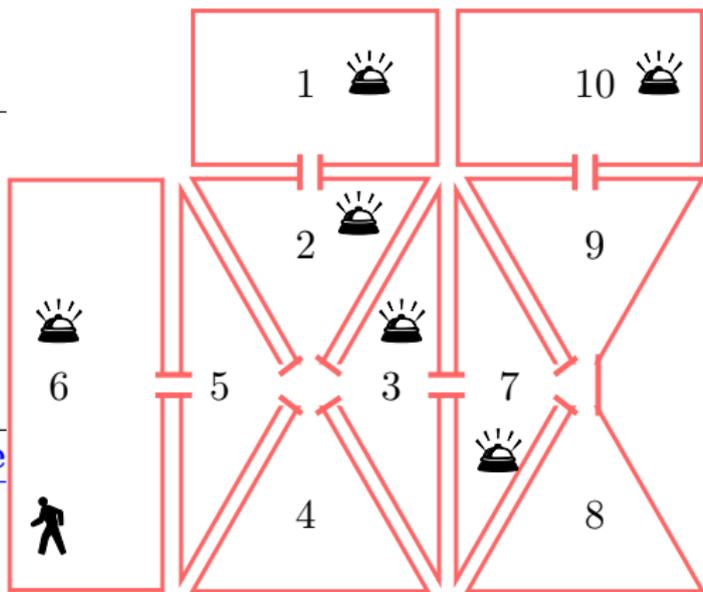

Identifying code (ID-Code)

[Karpovsky et. al., 1998]


- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code

(LD-Code) [Slater, 1987]

Open-locating-dominating code

(OLD-Code) [Seo & Slater, 2010]

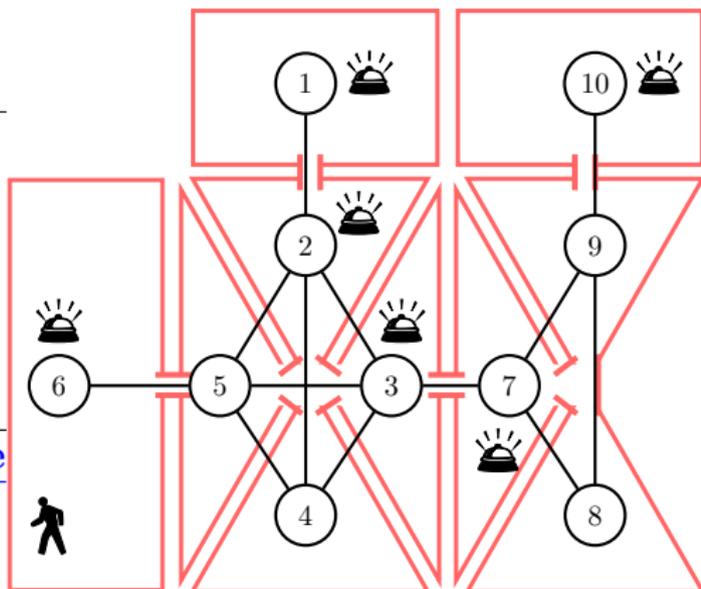

Identifying code (ID-Code)

[Karpovsky et. al., 1998]


- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code

(LD-Code) [Slater, 1987]

Open-locating-dominating code

(OLD-Code) [Seo & Slater, 2010]

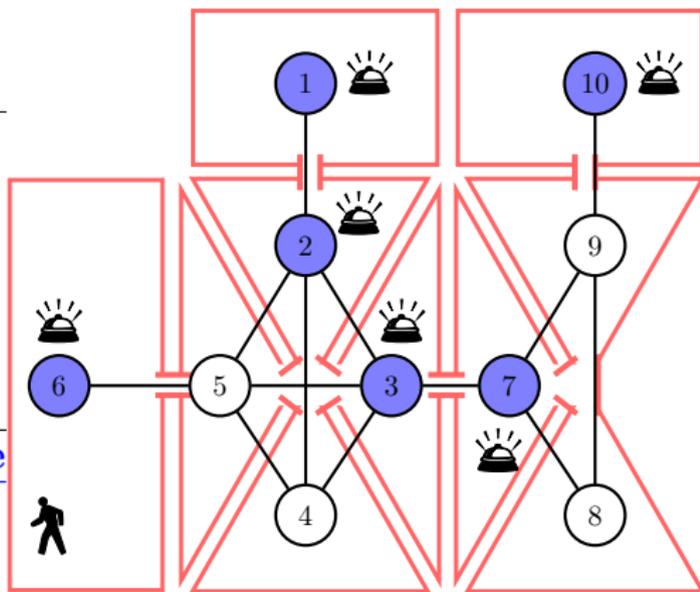

Identifying code (ID-Code)

[Karpovsky et. al., 1998]


- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code

(LD-Code) [Slater, 1987]

Open-locating-dominating code

(OLD-Code) [Seo & Slater, 2010]

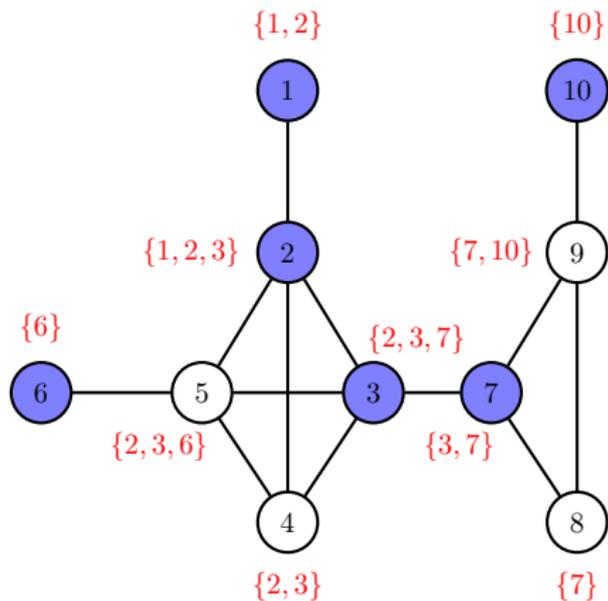

Identifying code (ID-Code)

[Karpovsky et. al., 1998]

- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.


Locating-dominating code

(LD-Code) [Slater, 1987]

- B is a dominating set of G ;
Unique $N(v) \cap B \forall v \notin B$.

Open-locating-dominating code

(OLD-Code) [Seo & Slater, 2010]

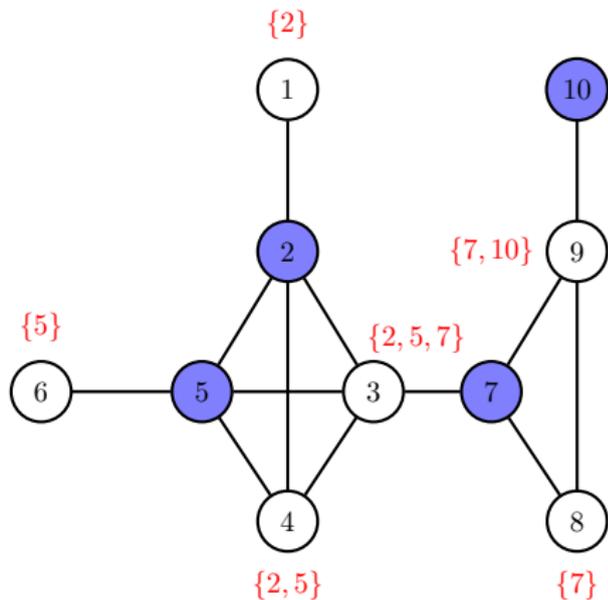

Identifying code (ID-Code)

[Karpovsky et. al., 1998]

- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.

Locating-dominating code (LD-Code)


[Slater, 1987]

- B is a dominating set of G ;
Unique $N(v) \cap B \forall v \notin B$.

Open-locating-dominating code (OLD-Code)

[Seo & Slater, 2010]

- B is total-dominating set of G ;
Unique $N(v) \cap B \forall v \in V(G)$.

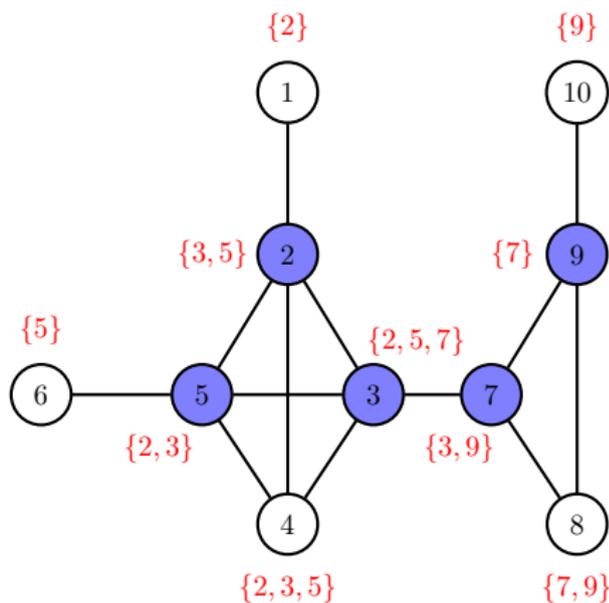

Identifying code (ID-Code)

[Karpovsky et. al., 1998]

- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.
- ID-number $\gamma^{ID}(G) = \min |B|$
 \forall ID-Code B of G

Locating-dominating code

(LD-Code) [Slater, 1987]

- B is a dominating set of G ;
Unique $N(v) \cap B \forall v \notin B$.
- LD-number $\gamma^{LD}(G) = \min |B|$
 \forall LD-Code B of G

Open-locating-dominating code

(OLD-Code) [Seo & Slater, 2010]

- B is total-dominating set of G ;
Unique $N(v) \cap B \forall v \in V(G)$.
- OLD-number $\gamma^{OLD}(G) = \min |B| \forall$ OLD-Code B of G

Identifying code (ID-Code)

[Karpovsky et. al., 1998]

- B is a dominating set of G ;
Unique $N[v] \cap B \forall v \in V(G)$.
- ID-number $\gamma^{ID}(G) = \min |B|$
 \forall ID-Code B of G

Locating-dominating Code

(LD-Code) [Slater, 1987]

- B is a dominating set of G ;
Unique $N(v) \cap B \forall v \notin B$.
- LD-number $\gamma^{LD}(G) = \min |B|$
 \forall LD-Code B of G

Open-locating-dominating code

(OLD-Code) [Seo & Slater, 2010]


- B is **total**-dominating set of G ;
Unique $N(v) \cap B \forall v \in V(G)$.
- OLD-number $\gamma^{OLD}(G) = \min |B|$
 \forall OLD-Code B of G

Exists only if G is closed
twin-free.


Always exists!

Exists only if G is open twin-free
and has no isolated vertices.


Some examples of code numbers

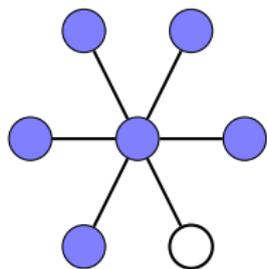


(a) $\gamma^{ID}(St_6) = \gamma^{LD}(St_6) = 5$

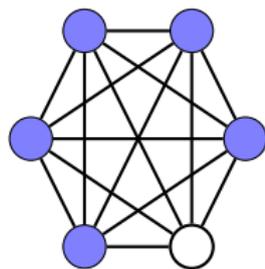

(b) $\gamma^{LD}(K_6) = \gamma^{OLD}(K_6) = 5$

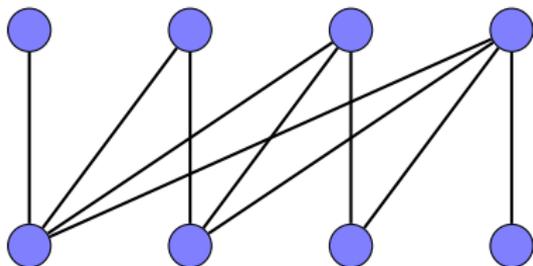


(a) $\gamma^{OLD}(HG) = 8$

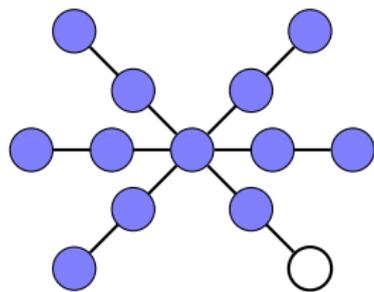


(b) $\gamma^{OLD}(SSt_6) = 12$


Block graph

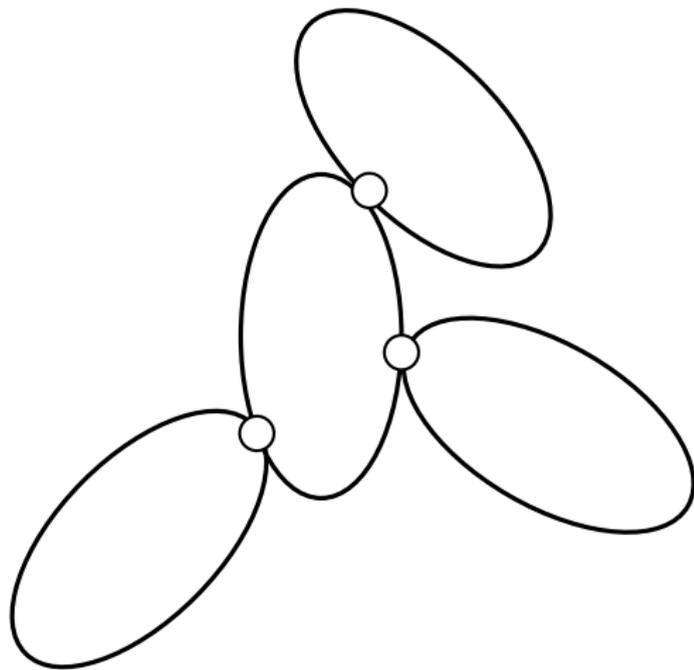


Block graph

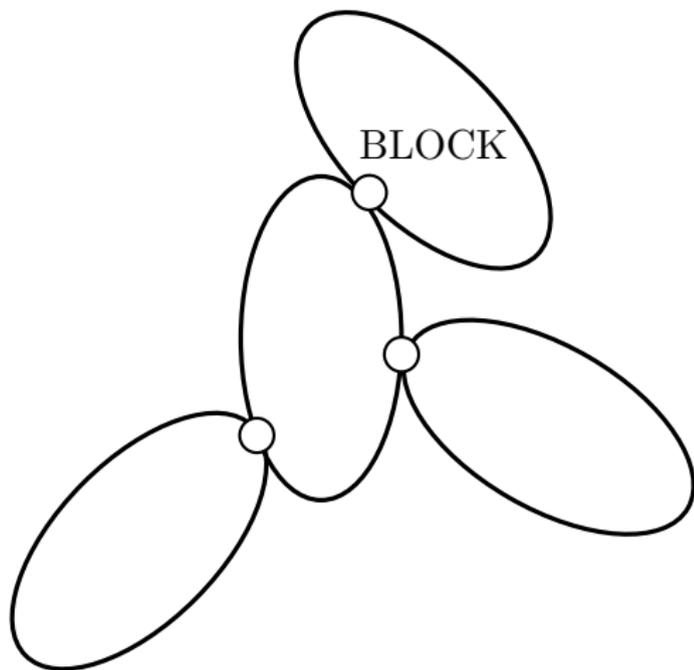

Block graph

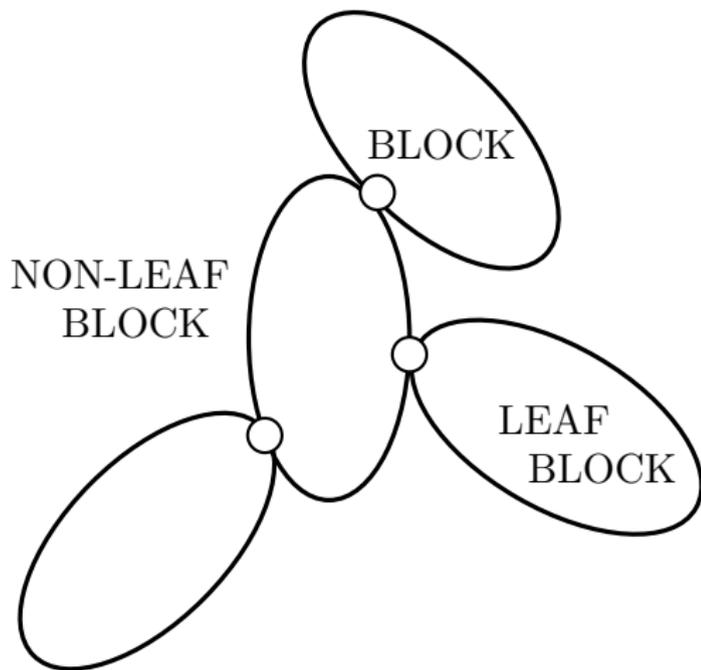


Block graph

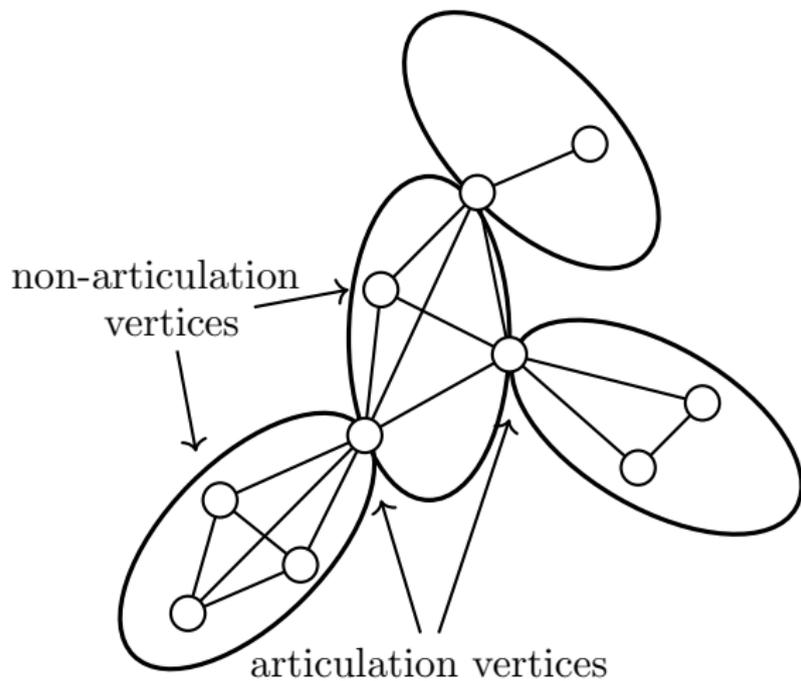

Results

Theorem (Conjecture. Argirosso et. al. (2018))


Let G be a closed twin-free block graph. Then $\gamma^{ID}(G) \leq n_Q(G)$, where $n_Q(G)$ is the number of blocks of G .

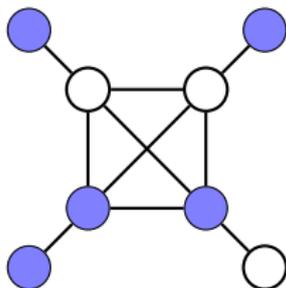

Results

Theorem

Let G be a block graph, $n_Q(G)$ be the number of blocks of G and $\mathcal{S} = \{S \subset V(G) : S \text{ is a maximal set of pairwise closed twins in some block}\}$. Then, $\gamma^{LD}(G) \leq n_Q(G) + \sum_{S \in \mathcal{S}} (|S| - 2)$.

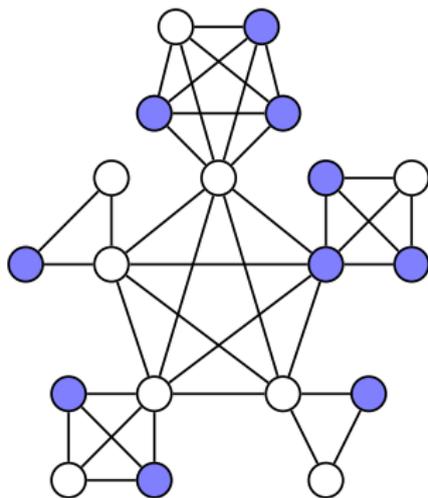


Results

Theorem

Let G be a twin-free block graph without isolated vertices. Then,
 $\gamma^{LD}(G) \leq \frac{1}{2}|V(G)|$.

Conjecture. Garijo et. al (2014): Let G be a twin-free graph without isolated vertices. Then, $\gamma^{LD}(G) \leq \frac{1}{2}|V(G)|$.

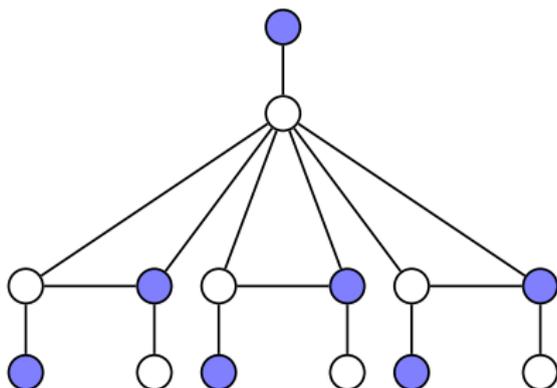


Results

Theorem

Let G be an open twin-free block graph, with no isolated vertices and $G \not\cong P_2, P_4$. Let $m_Q(G)$ be the number of non-leaf blocks with at least one non-articulation vertex. Then, $\gamma^{OLD}(G) \leq |V(G)| - 1 - m_Q(G)$.

Foucaud et. al. (2021): For an open twin-free graph G , $\gamma^{OLD}(G) \leq |V(G)| - 1$ unless G is a half-graph (a special kind of bipartite graph)

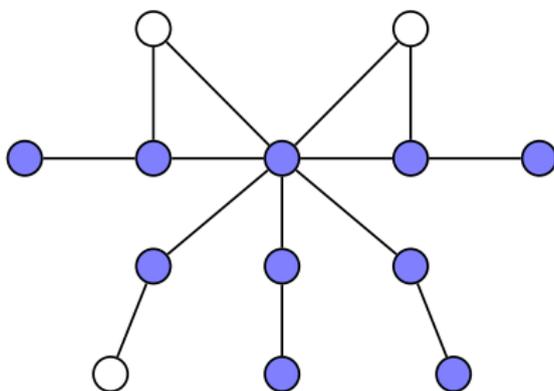


Results

Theorem


Let G be a block graph. Then

- $\gamma^{ID}(G) \geq \frac{|V(G)|}{3} + 1$,
- $\gamma^{OLD}(G) \geq \frac{|V(G)|}{3} + 1$ (except when $G \cong \text{kite}$), and
- $\gamma^{LD}(G) \geq \frac{|V(G)|+1}{3}$.


General lower bound: $\gamma^{ID}(G), \gamma^{LD}(G), \gamma^{OLD}(G) \geq \lceil \log_2(|V(G)| + 1) \rceil$.

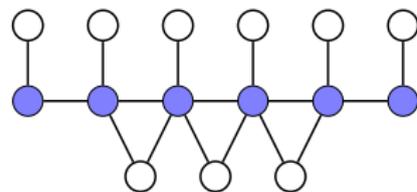

(a) $\gamma^{ID}(G) = 6, |V(G)| = 15$

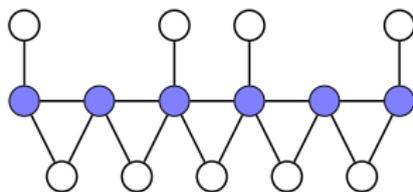

(b) $\gamma^{OLD}(G) = 6, |V(G)| = 15$

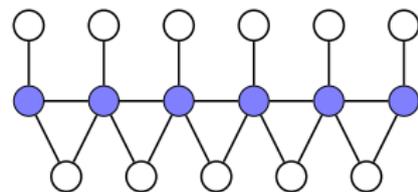


(c) $\gamma^{LD}(G) = 6, |V(G)| = 17$

Results

Theorem


Let G be a block graph. Then

- $\gamma^{ID}(G) \geq \frac{3(n_Q(G)+2)}{7}$,
- $\gamma^{LD}(G) \geq \frac{n_Q(G)+2}{3}$, and
- $\gamma^{OLD}(G) \geq \frac{n_Q(G)+3}{2}$.

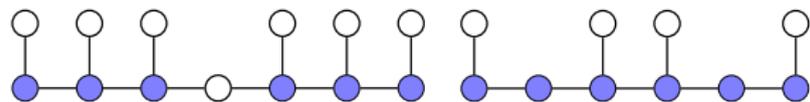

(a) $\gamma^{ID}(G) = 6, |V(G)| = 13$

(b) $\gamma^{OLD}(G) = 6, |V(G)| = 10$

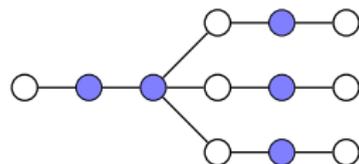

(c) $\gamma^{LD}(G) = 5, |V(G)| = 12$

Thank you!